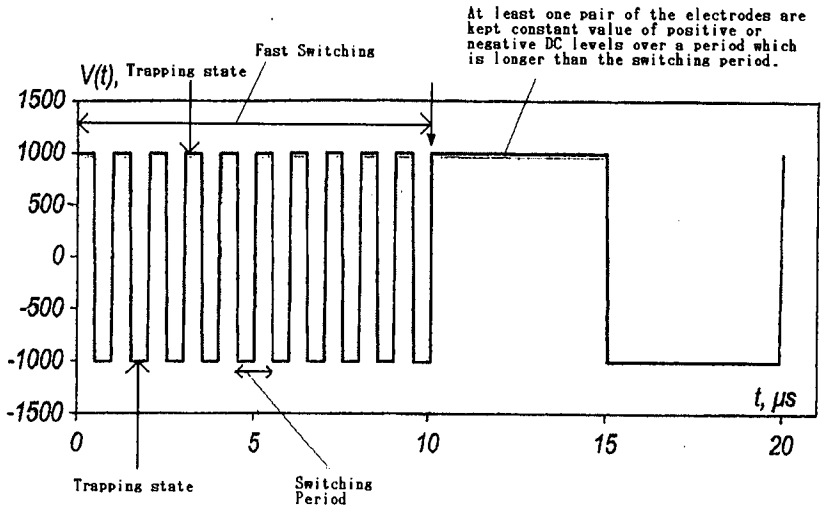
At least one pair of the electrodes are kept constant value of positive or negative DC levels over a period which is longer than the switching period.
Fast Switching
V(t), Trapping state
1500
1000
500
0
-500
-1000
-1500
0
5
10
15
20
t, μs
Trapping state
Switching Period